


THERMOID® FUEL OIL DELIVERY

THE THERMOID® FUEL OIL HOSE IS DESIGNED TO TRANSFER A WIDE VARIETY OF FUELS, OILS, AND OTHER PETROLEUM-BASED PRODUCTS FOR HOME DELIVERY, MARINE, COMMERCIAL AND INDUSTRIAL SERVICE. THE UNIQUE SPIRAL CONSTRUCTION ADDS STRENGTH AND FLEXIBILITY TO MAKE IT EASY TO HANDLE & KINK RESISTANT. A SMOOTH, DURABLE COVER RESISTS OIL AND ABRASION AND PROVIDES EXCELLENT DRAG RESISTANCE.



RESISTANCE

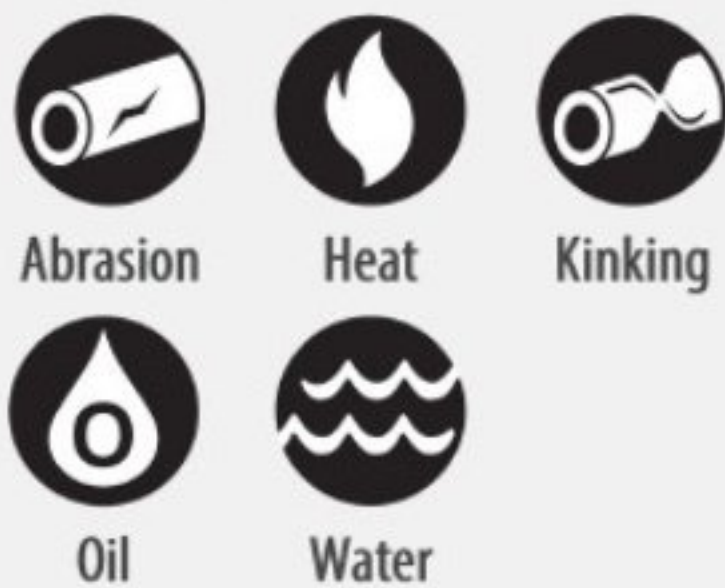

BRANDING: Thermoid Fuel Oil Hose WP
250 PSI Made In USA Month/Year

COVER COLOR: Red

CONSTRUCTION

TUBE: Nitrile, ARPM - Class A
• Oil Resistant
• Designed to Handle a Variety of Fuel Oils
• Water Resistant

COVER: Nitrile Blend, ARPM - Class A
• Oil Resistant
• Abrasion Resistant
• Heat Resistant

REINFORCEMENT: Polyester
• Provides a Working Pressure of 250 psi
• More Flexible than Braid Reinforced Hose
• Easier to Route Assemblies
• Less Susceptible to Premature Failure than Braided Hose if Subjected to Torque
• Kink Resistant

TEMPERATURE RANGE:

- Fuel Oils -40°F to +150°F, -40°C to +70°C
- Gasoline/Gasoline Blends -40°F to +104°F, -40°C to +40°C

PACKAGING: Reels, Coupled and Uncoupled Lengths

STATIC WIRE, ALL SIZES

- Safety - Grounds the Hose

NOTE: A static wire is included on all sizes as a safety precaution.

Compatible fuels are kerosene, diesel, Biodiesel and Biodiesel blends (based on biodiesel fuel equivalent to ASTM D 6751).

For use in dedicated service only with compatible fuels. No alternating fuel types.

Use in gasoline or ethanol blend applications above +104°F (+40°C) is not recommended.

Product Number	Packaging	Nominal I.D.		Nominal O.D.		Reinforcement Spirals	Working Pressure		Min. Bend Radius		Weight	
	Reels (ft.)	(inches)	(mm)	(inches)	(mm)		(psi)	(Mpa)	(inches)	(mm)	(lb/ft)	(Kg/m)
22564642662	450	1	25.40	1.50	38.10	4	250	1.72	7.00	177.80	0.47	0.70
22564802662	300	1-¼	31.75	1.78	45.24	4	250	1.72	8.75	222.25	0.59	0.88
22564882662	300	1-¾	34.93	1.88	47.63	4	250	1.72	9.25	234.95	0.65	0.97
22564962662	300	1-½	38.10	2.09	53.18	4	250	1.72	10.50	266.70	0.80	1.19